

Speed screw driving with high accuracy


More features

Compact and Lightweight

User-friendly size and weight of EYFEA1N can reduce operator fatigue. Well balanced T shape body and slim grip also improve operator acceptance.

Weight
1.39 lbs.

Length
5.7"

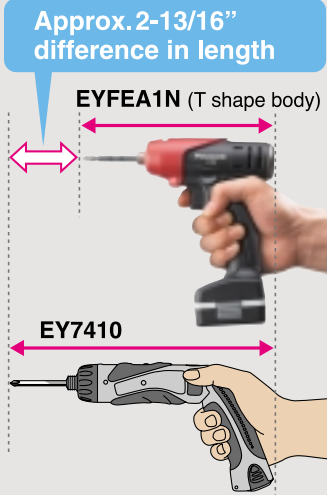


Clutch & High/Low switch lock cover.

Clutch & High/Low switch lock cover prevents the operator from changing clutch setting or RPM setting by mistake.



LED light

Operation in dimly lit areas is improved with the built in LED light.



<Product Specification>

Cordless Drill & Driver		Chuck Size	□ 1/4" Hex Quick Change	
EYFEA1N2S/EYFEA1N		Max. torque in non-shut off mode	High: 17.7 in.lbs. Low: 53.1 in.lbs.	
<p>7.2V</p> <p>1.5Ah Li-ion</p>	Speed at No Load		High: 0~900 rpm Low: 0~300 rpm	
	Clutch Torque (Approx.)		High: 2.7-17.7 in.lbs. (stage 1-10, 1.7 N·m per stage) Low: 2.7-35.4 in.lbs. (stage 1-21, 1.7 N·m per stage)	
	Size (LxHxW)		5.7" x 7.8" x 1.65"	
	Weight		1.39 lbs.	
	Battery Capacity		Li-ion 1.5Ah	
	Charging Time (Battery pack EY9L20, charger EY0L20)		Usable charge: Approx. 35 minutes Full charge: Approx. 60 minutes	
	Max. Screws Driving		High mode: M4 screw, Low mode: M5 screw	
	Working Capacity	Fastening	Screws in Sheet Metal (M2.5 x 1/4")	High: Approx. 1900 pcs
			Screws in Sheet Metal (M4 x 3/8")	High: Approx. 1850 pcs
			Screws in Sheet Metal (M5 x 5/16")	Low: Approx. 1450 pcs
Function		Auto Shut-Off Function Auto-Power Stop Function LED Light Clutch & H/L switch lock cover Electronic brake		

*This model is only for screw tightening, and can not be applied for Drilling operation.

* In the operation on soft-joint, there may be a case that the clutch can not be operated.

<Accessory>

EYFEA1N2S Standard Accessory	EYFEA1N Standard Accessory	1.5Ah Li-ion battery pack EY9L20B	Charger EY0L20B
2 X 1.5Ah Li-ion battery pack (EY9L20B) Charger (EY0L20B) Clutch & H/L switch lock cover	Clutch & H/L switch lock cover		